


## 6G26

Bore 260 mm, Stroke 390 mm

Main Data					
Speed	750 rpm		720 rpm		
Frequency	50 Hz		60 Hz		
<b>Model</b>	<b>Genset. kw</b>	<b>Engine. kw</b>	<b>Genset. kw</b>	<b>Engine. kw</b>	
6G26	1,900	1,998	1,825	1,920	
6G26-2	1,675	1,765	1,610	1,695	
Based on alternator efficiency of 95%.					
Specific Consumption					
100% Load	Unit		Engine	Genset	
Fuel Oil Consumption	g/kWh		185	196	
Lube oil consumption	g/kWh		0.8	0.81	
Dimensions					
Speed	Cyl.	Dimensions (mm) <sup>1)</sup>			Dry Mass (ton) <sup>2)</sup>
		L	B	H	Genset <sup>1),3)</sup>
	6	8,152	1,683	2,989	53

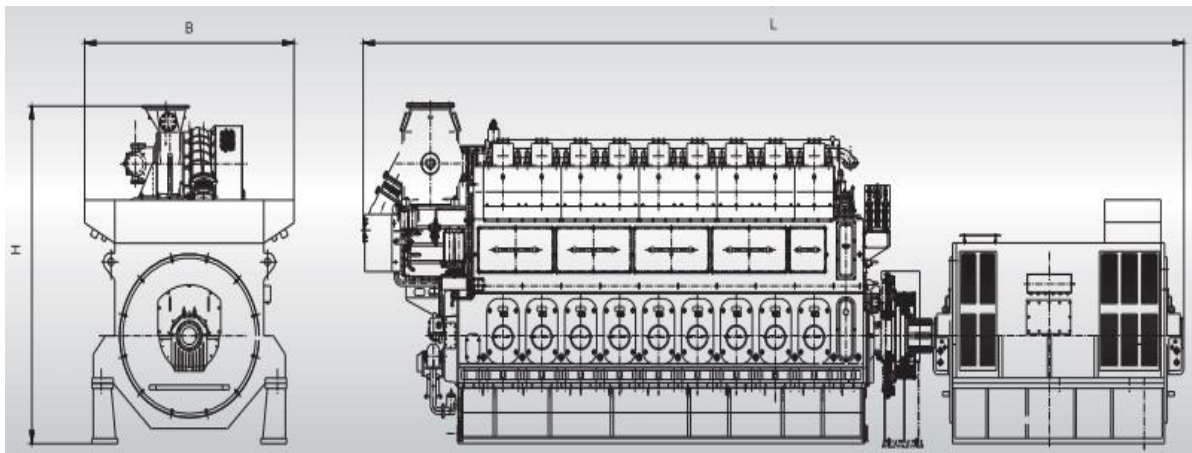

### Remarks:

- 1) Depending on alternator.
- 2) Weight included a standard alternator (Maker: GDF).
- 3) With common base frame & alternator.

Note) All dimensions and weight are approximate value and subject to change without prior notice.

URL: <http://www.soarpower.com>

E-mail: [sale@soarpower.com](mailto:sale@soarpower.com)

Phone: +86-4008111308