


## L6230

Bore 200 mm, Stroke 285 mm

Main Data					
Speed	1000 rpm		900 rpm		
Frequency	50 Hz		60 Hz		
Model	Genset. kw	Engine. kw	Genset. kw	Engine. kw	
1000GF	1,000	1,103	1,000	1,103	
1200GF	1,200	1,324	-	-	
Based on alternator efficiency of 95%.					
Specific Consumption					
100% Load		Unit			
Fuel Oil Consumption		g/kWh		190	
Lube oil consumption		g/kWh		0.5 - 0.8	
Dimensions					
Speed	Cyl.	Dimensions (mm) <sup>1)</sup>			Dry Mass (ton) <sup>2)</sup>
		L	B	H	Genset <sup>1),3)</sup>
	6	5,484	1,675	2,704	16800

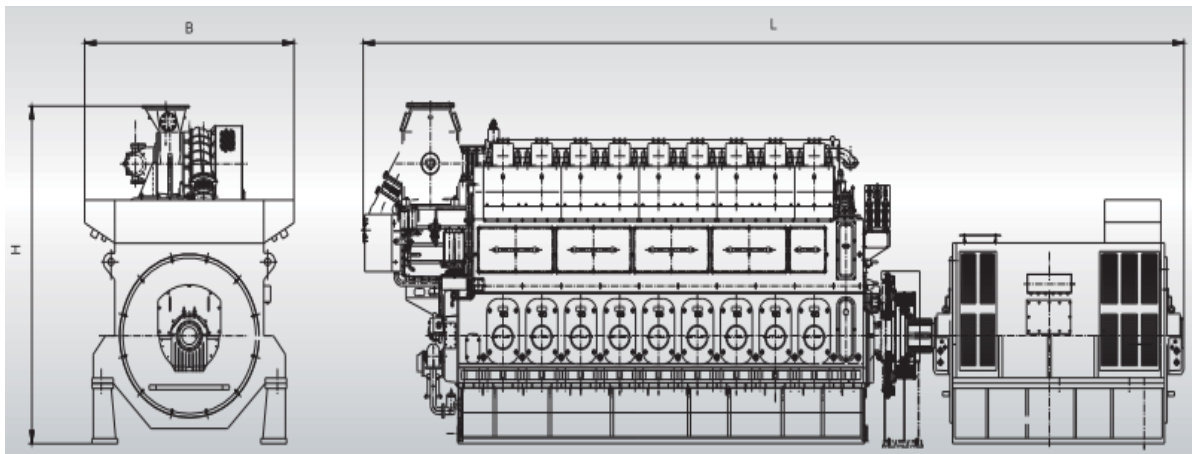

### Remarks:

- 1) Depending on alternator.
- 2) Weight included a standard alternator (Maker: ZCP).
- 3) With common base frame & alternator.
- 4) This size is only for reference. The actual size is subject to the size defined in the agreement of the specific project..

URL: <http://www.soarpower.com>

E-mail: [sale@soarpower.com](mailto:sale@soarpower.com)

Phone: +86-4008111308